

AUDIO-DINST

Streaming Audio player with line out, KNXnet/IP, Trigger for 4 zones

Amati.linea Streaming Player is a high-fidelity, DIN-rail mounted audio solution designed for seamless integration into building automation systems.

Physical interfaces

RJ45	1
Line-out pair	2 (RCA or clamp)
Triggers (zone control)	4 (24 V DC)
Reset button	1
USB 2.0	1

Power

Power supply	24 V DC via terminals
Power consumption	1.4 W

Connections

Power / Line-out / Triggers	Clamp, 0.8 mm ² .. 1.5 mm ²
Line-out	RCA

Indicators

LED 1	Green blinking – System load
LED 2	Off – Normal operation / Green – Reset

Enclosure

Mounting support	DIN rail
DIN module width	3
Dimensions WxHxD	54 x 112 x 61 mm
IP degree of protection	IP20
Net weight	110 g

Standards compliance


EMC	EN61000-6-1; EN61000-6-3
-----	--------------------------

Environment

Operational temperature	0 °C .. +45 °C
Storage temperature	-15 °C .. +55 °C
Relative humidity	0% ... 93% (without condensation)

Warranty

2 years

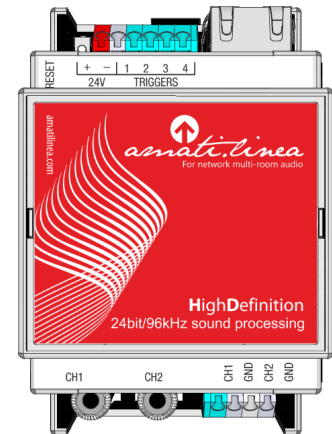

Key highlights

Versatile Streaming Support

Compatible with DLNA/UPnP servers, Spotify Connect (premium), AirPlay, FTP, NFS, HTTP servers, and includes 16GB of built-in media storage

High-Resolution Audio

Supports lossless audio formats (ALAC/FLAC) with playback up to 24-bit/96kHz for superior sound quality

Building Automation Integration:

Equipped with KNXnet/IP and BACnet/IP protocols for seamless integration into smart building systems

Flexible Control Options

Allows mapping of audio controls to KNX group addresses, enabling functions like radio channel switching and sound notifications via KNX push-buttons

Compact DIN-Rail Design

Designed for easy installation in standard electrical cabinets, suitable for both residential and commercial setups