

CAN-A08-LoRa

CANx LoRa 8 x 0-10V Analog outputs

CAN-A08-LoRa is a DIN-rail mounted module with eight independent 0–10V analog outputs, ideal for controlling dimmable lighting, HVAC systems, or analog-driven devices within a CANx automation network.

Physical interfaces

Analog outputs	8 (0-10 V)
CAN FT	1
Programming / reset button	1
USB 2.0	1 (only for device firmware upgrade)

Radio interface

LoRa 433	1 (on-board antenna)
Transmitter power	1.6 .. 50 mW (software adjustable)
Frequency range	433 .. 434.75 MHz

Power

Power supply	24 V DC
Power consumption	0.82 W (stand-by), 1.2 W (LoRa active)

Connections

CANx bus	Bus connection terminal, 0.8 mm ²
Power supply and outputs	Screw terminals, 0.8 mm ² .. 1.5 mm ²

LED indicators

Green	Bus activity / programming mode
Red	Bus or hardware fault / reset
Yellow /Blue	LoRa transmit / receive

Enclosure

Mounting support	DIN rail
DIN module width	3
Dimensions WxHxD	54 x 112 x 61 mm
IP degree of protection	IP20
Net weight	87 g

Standards compliance


EMC	EN61000-6-1; EN61000-6-3
-----	--------------------------

Environment

Operational temperature	0 °C .. +45 °C
Storage temperature	-15 °C .. +55 °C
Relative humidity	0% ... 93% (without condensation)

Warranty

2 years

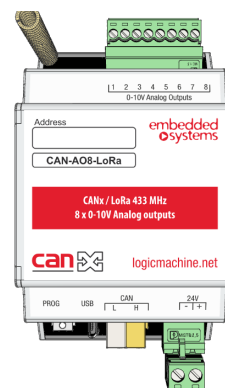

Key highlights

Robust and efficient communication

Utilizes time-proven CAN FT field bus.

High bandwidth CAN FT bus

Supports 48Kbps over CAN FT bus, ensuring fast and reliable data transfer.

LoRa-enabled variants

Selected CANx devices offer LoRa 433 wireless communication for flexibility.

Seamless protocol interoperability *

Unified data types enable smooth integration with other systems such as KNX, Modbus, BACnet, MQTT, and more.

Co-exists with KNX while enhancing performance *

Eliminates KNX fieldbus limitations (speed, semantics) while maintaining full user experience and compatibility with KNX.

ETS-friendly integration *

Supports importing KNX project files and enriching them with semantics for advanced data modelling.

Comprehensive commissioning *

Free CANx and DALI web-based commissioning tools available via the LogicMachine app store for device discovery, configuration and diagnostics.

** LogicMachine is required for commissioning and interconnectivity with other protocols.*